

# Main Street



## SPECIFICATIONS:

### Housing:

Die-cast aluminum construction, stainless steel hardware, Full Gasket housing protects from the harshest environment.

### Lens & Removable Door Assembly:

Hinged door assembly formed from one piece die-cast corrosion resistant aluminum. The lens is A clear 1/8" tempered flat glass, secured by galvanized lens clips and sealed with silicone gasket To ensure protection from The harshest environment.

### Electrical Assembly:

HID ballast constant wattage auto-transformer high power factor core and coil type, rated -20 degrees Fahrenheit starting temperature. Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast and electrical components are "UL" listed.

### Lamp Socket:

Porcelain Socket pulse rated for HPS, MH & PS lamps. Lamp included.

### Finish:


Thermoset polyester textured powder coat finish, chemically pretreated through a multi-stage washer, oven baked at 400 Deg. Fahrenheit to insure maximum adherence.

## Decorative Architectural Style

## Job Information

Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

## DIMENSIONAL DRAWINGS

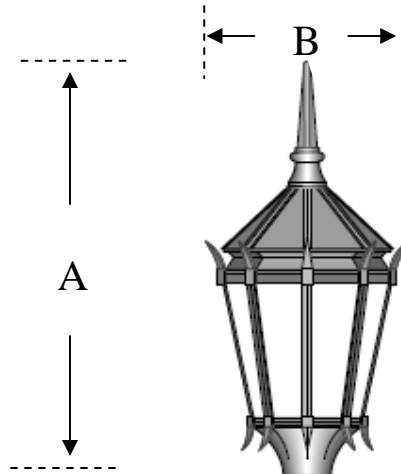

Model #	A	B	Max. Watt	EPA
MST-1	40"	22"	250	2.2

# Architectural HID Area Lighting

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>MST-1</li> </ul>	Type II <ul style="list-style-type: none"> <li>(T2)</li> </ul> Type III <ul style="list-style-type: none"> <li>(T3)</li> </ul> Type IV <ul style="list-style-type: none"> <li>(T4)</li> </ul> Type V <ul style="list-style-type: none"> <li>(T5)</li> </ul>	70w <ul style="list-style-type: none"> <li>(70)</li> </ul> 100w <ul style="list-style-type: none"> <li>(100)</li> </ul> 150w <ul style="list-style-type: none"> <li>(150)</li> </ul> 175w <ul style="list-style-type: none"> <li>(175)</li> </ul> 250w <ul style="list-style-type: none"> <li>(250)</li> </ul>	HPS <ul style="list-style-type: none"> <li>(HPS)</li> </ul> Metal Halide <ul style="list-style-type: none"> <li>(MH)</li> </ul> Pulse Start Metal Halide <ul style="list-style-type: none"> <li>(PS)</li> </ul> Compact Fluorescent <ul style="list-style-type: none"> <li>(CFL)</li> </ul> Consult Factory	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> 480 Volts <ul style="list-style-type: none"> <li>(480)</li> </ul> Multi-Tap Ballast Factory wired at 277 volts unless otherwise specified.	Single <ul style="list-style-type: none"> <li>(S1) Mounts over 4" round Fitter</li> </ul> Double 180 <ul style="list-style-type: none"> <li>(D2)</li> </ul> Double 90 <ul style="list-style-type: none"> <li>(D9)</li> </ul> Triple 90 <ul style="list-style-type: none"> <li>(T90)</li> </ul> Triple 120 <ul style="list-style-type: none"> <li>(T120)</li> </ul> Quad <ul style="list-style-type: none"> <li>(Q4)</li> </ul> Quad + post Top <ul style="list-style-type: none"> <li>(Q5)</li> </ul>	Texture Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul> Black <ul style="list-style-type: none"> <li>(BK)</li> </ul> Green <ul style="list-style-type: none"> <li>(GN)</li> </ul> Grey <ul style="list-style-type: none"> <li>(GY)</li> </ul> Other colors available Consult Factory	Photo Cell 120 - 277v <ul style="list-style-type: none"> <li>(PC__)</li> </ul> Single Fuse <ul style="list-style-type: none"> <li>(SF)</li> </ul> Double fuse <ul style="list-style-type: none"> <li>(DF)</li> </ul> House side Shield <ul style="list-style-type: none"> <li>(HSS)</li> </ul> Quarts Re-strike <ul style="list-style-type: none"> <li>(QR)</li> </ul> Frosted Lens <ul style="list-style-type: none"> <li>(FL)</li> </ul>

Direct Lighting reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions