

# Monte Carlo



## SPECIFICATIONS:

### Housing:

Corrosion Resistant Cast Aluminum Alloy .188" Wall Thickness

### Glass Lens:

The Lens is a Clear Tempered Flat glass, Secured by Galvanized Lens clips And Sealed With silicon Gasket to Ensure Protection From the Harsh Environment.

### Optics:

A Horizontal Segmented Reflector With Specular Aluminum finish or glass Refractor types III or IV.

### Electrical Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core and coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast Assembly Is Thoroughly Tested Prior To Shipment. Ballast and Electrical Components Are "UL" Listed.

### Lamp Socket:

Standard Porcelain Socket Pulse Rated For MH, HPS Socket.


### Finish:

Chemically pretreated through a multiple stage washer, thermoset polyester textured Powder Coat min. 2-4 mil. Thickness. Oven baked at 400 degrees Fahrenheit to insure maximum adherence.

## Job Information

Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

## DIMENSIONAL DRAWINGS

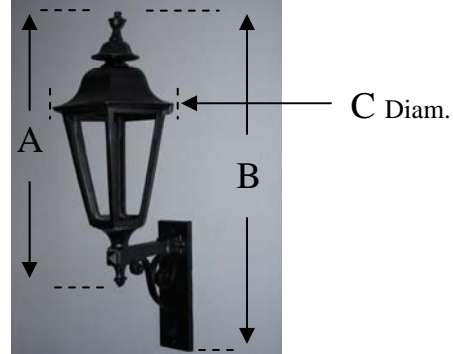

Fixture	A	B	C	HID Max. Watts	CFL Max.	LBS.
MCO-1	30"	40"	13"	175w	42w	42

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Wiring	Finish	Options
<ul style="list-style-type: none"> <li>MCO-1</li> </ul>	TYPE II <ul style="list-style-type: none"> <li>(T2)</li> </ul> TYPE III <ul style="list-style-type: none"> <li>(T3)</li> </ul> TYPE V <ul style="list-style-type: none"> <li>(5)</li> </ul> Glass Refractor Type III <ul style="list-style-type: none"> <li>(G3)</li> </ul> Type V <ul style="list-style-type: none"> <li>(G5)</li> </ul>	<u>HID</u> 50w <ul style="list-style-type: none"> <li>(50)</li> </ul> 70w <ul style="list-style-type: none"> <li>(70)</li> </ul> 100w <ul style="list-style-type: none"> <li>(100)</li> </ul> 175w <ul style="list-style-type: none"> <li>(15)</li> </ul> <u>CFL</u> 26w <ul style="list-style-type: none"> <li>(26)</li> </ul> 42w <ul style="list-style-type: none"> <li>(42)</li> </ul>	Metal Halide <ul style="list-style-type: none"> <li>(MH)</li> </ul> Compact Fluorescent <ul style="list-style-type: none"> <li>(CFL)</li> </ul> Available In Dual Volts 120/277 Only	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> 480 Volts <ul style="list-style-type: none"> <li>(480)</li> </ul> Multi-Tap Ballast Factory wired at 277v unless otherwise specified.	Pole Mount <ul style="list-style-type: none"> <li>(PM)</li> </ul> Wall Mount <ul style="list-style-type: none"> <li>(WM)</li> </ul>	Texture Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul> Black <ul style="list-style-type: none"> <li>(BK)</li> </ul> Green <ul style="list-style-type: none"> <li>(GN)</li> </ul> Grey <ul style="list-style-type: none"> <li>(GY)</li> </ul> Custom Color <ul style="list-style-type: none"> <li>(CC)</li> </ul> Consult Factory	Photocell 120 - 277v <ul style="list-style-type: none"> <li>(PC__)</li> </ul> House Side Light Shield <ul style="list-style-type: none"> <li>(HSS)</li> </ul> Round Pole adaptor <ul style="list-style-type: none"> <li>(RPA)</li> </ul> Wall Plate <ul style="list-style-type: none"> <li>(WP)</li> </ul>

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions