


# CB800 Series Bollard

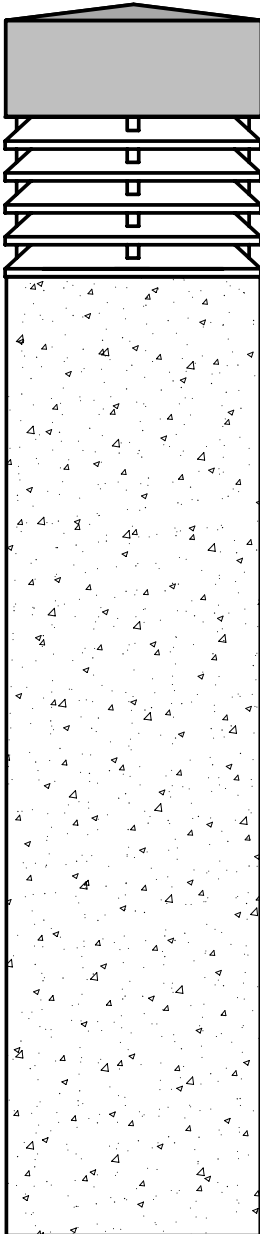

## Specifications

### Structural

8" Concrete bollard with (5) top cap options and (5) optical choices.

### Electrical

Ballast and electrical components are "UL listed", factory pre-wired and mounted to a rigid support for suspension within the concrete base. A quick-disconnect electrical plug will be provided for easy installation and servicing.

### Luminaire


Reflector, louvers and refractors shall provide optimum lighting performance and weathertite operation.

### Luminaire Finish

Thermoset polyester powder coating is electrostatically applied and baked to form a smooth durable maintenance free finish. Specify; "GY" light grey, "BK" black, "WH" white or "BZ" bronze. Consult factory for other colors.

### Anchorage

Anchor base bollards "AB" are supplied with plated anchor bolts for installation into a concrete footing.

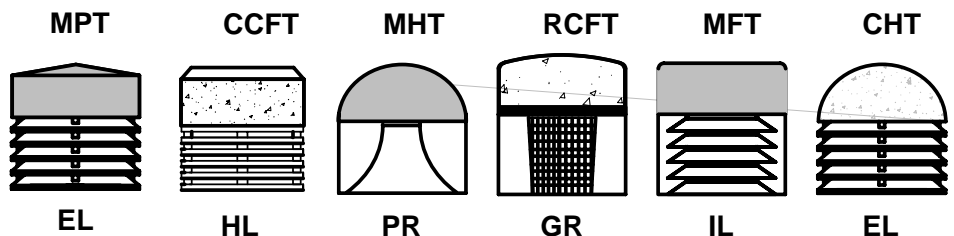

## Ordering Guide.....

Example: TCB800-CCFT-HL- 100MH-120-42-AB-BZ-CO-SB-Lamp

Luminaire Series	Shape	Top	Reflector	Watts	Lamp	Volts	Height	Anchor Type	Luminaire Color	Concrete Color	Concrete Finish	Options			
TCB800	SQ Square	MPT	Metal Pointed top	7 thru 150	HPS MH MV FL	120 208 240 277	18" 24" 30" 36" 42"	AB Anchor Base	NA	N Natural BR Brown WH White BU Buff CO Copper SP Special	MF Mold Finish SB Sandblast EA Exposed Aggregate	HSS = House Side Shield LAMP = Lamp installed PC = Photocell installed RECP = Receptacle SP = Special			
		CCFT	Chamfered Concrete Flat Top						HL				Horizontal Louver	BK	Black
	RD Round	MHT	Metal Hemi-top						PR**				Pericline Reflector	WH	White
		MFT	Metal Flat top						IL				Internal Louver	BZ	Dark Bronze
		CHT	Concrete Hemi-top						GR				Glass Refractor	SP	Special
		RCFT	Radius Concrete Flat Top												

\* Not available with square

\*\*Not available with some concrete tops

CONSULT FACTORY FOR MORE OPTIONS