



# Top Hat

**Decorative Architectural Style**

Job Information	
Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	
<b>DIMENSIONAL DRAWINGS</b>	

**SPECIFICATIONS:**

**Housing:**

Heavy-Duty spun aluminum housing and shade construction in a manner to maintain a weather tight seal.

**Lens:**

Hood assembly formed from one piece spun aluminum .080" corrosion resistant aluminum with stainless steel fasteners. The lens is A clear impact-resistant acrylic, secured by galvanized lens clips and sealed with silicone gasket to ensure protection from the harshest environment.

**Electrical Assembly:**


HID ballast constant wattage auto-transformer high power factor core and coil type, rated -20 degrees Fahrenheit starting temperature. Integrally Mounted in the luminaire and completely prewired. Each ballast assembly is thoroughly tested prior to shipment. Ballast And Electrical Components are "UL" Listed.

**Lamp Socket:**

Porcelain Socket pulse rated for HPS, MH, PS & CFL lamps. Lamp included.

**Finish:**

Thermoset Polyester Textured Powder Coat Finish, Chemically Pretreated Through a Multi-Stage Washer, Oven Baked at 400 Deg. Fahrenheit to insure Maximum Adherence.

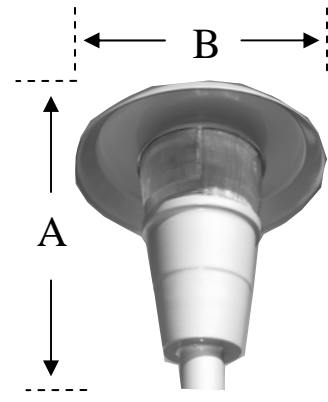

Model #	A	B	Max. Watt	EPA
THT-1	25"	24"	175	2.0

**ORDERING INFORMATION:**

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>THT-1</li> </ul>	Type III <ul style="list-style-type: none"> <li>(T3)</li> </ul> Type V <ul style="list-style-type: none"> <li>(T5)</li> </ul>	70w <ul style="list-style-type: none"> <li>(70)</li> </ul> 100w <ul style="list-style-type: none"> <li>(100)</li> </ul> 150w <ul style="list-style-type: none"> <li>(150)</li> </ul> 175w <ul style="list-style-type: none"> <li>(175)</li> </ul>	HPS <ul style="list-style-type: none"> <li>(HPS)</li> </ul> Metal Halide <ul style="list-style-type: none"> <li>(MH)</li> </ul> Pulse Start Metal Halide <ul style="list-style-type: none"> <li>(PS)</li> </ul> Compact Fluorescent <ul style="list-style-type: none"> <li>(CFL)</li> </ul> Consult Factory	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> 480 Volts <ul style="list-style-type: none"> <li>(480)</li> </ul> Multi-Tap Ballast Factory wired at 277 volts unless otherwise specified.	Single <ul style="list-style-type: none"> <li>(S1)</li> </ul> Mounts over 3" round fitter  Double <ul style="list-style-type: none"> <li>(D2)</li> </ul> See decorative arm options table	Texture Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul> Black <ul style="list-style-type: none"> <li>(BK)</li> </ul> Green <ul style="list-style-type: none"> <li>(GN)</li> </ul> Grey <ul style="list-style-type: none"> <li>(GY)</li> </ul> Other colors available Consult Factory	Photo Cell 120 thru 277v <ul style="list-style-type: none"> <li>(PC__)</li> </ul> Single Fuse <ul style="list-style-type: none"> <li>(SF)</li> </ul> Double fuse <ul style="list-style-type: none"> <li>(DF)</li> </ul>

Direct Lighting reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions