

# WPC25



## SPECIFICATIONS:

### Housing:

Die-Cast Aluminum housing with threaded holes provided for surface conduit entry or optional photo cell. Door frame is Hinged for easy re-lamping complete with weather proof silicone seal.

### Lens:

Clear 1/8" thick tempered glass refractor is thermal and shock Resistant.

### Reflector:

Hammered specular aluminum reflector for optimum light distribution.

### Electrical Assembly:

HID Ballast constant Wattage Auto-Transformer High Power Factor Core And coil Type, Rated -20 Degrees Fahrenheit Staring Temperature. Integrally Mounted in the Luminaire and Completely Prewired. Each Ballast Assembly Is Thoroughly Tested Prior To Shipment. Ballast and electrical components are "UL" listed

### Lamp Socket:

Porcelain Socket pulse rated for HPS, MH & PS lamps. Lamp included.


### Finish:

Electro-Static Powder Coat Bronze, White & black contact factory for custom Colors.

## Job Information


Project:	Date:
Location:	
Fixture Type:	Cat. #
Lamp:	Volts:
Options & Accessories:	

## DIMENSIONAL DRAWINGS

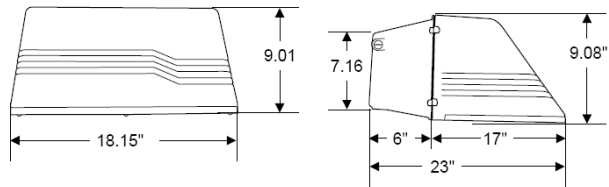

Height	Width	Depth	MH	PS	HPS	Weight
9.08"	18.15"	23"	250-400	250-400	250-400	28 lbs.

## Isolux Curves



400w MH  
@ 25-Ft.  
Mounting  
Height

## ORDERING INFORMATION:

Model	Optics	Wattage	Source	Voltage	Mounting	Finish	Options
<ul style="list-style-type: none"> <li>WCP25</li> </ul>	Forward Throw Wide <ul style="list-style-type: none"> <li>(FTW)</li> </ul>	100w <ul style="list-style-type: none"> <li>(100)</li> </ul> 150w <ul style="list-style-type: none"> <li>(150)</li> </ul> 250w <ul style="list-style-type: none"> <li>(250)</li> </ul> 320w <ul style="list-style-type: none"> <li>(320)</li> </ul> 350w <ul style="list-style-type: none"> <li>(350)</li> </ul> 400w <ul style="list-style-type: none"> <li>(400)</li> </ul>	High Pressure Sodium <ul style="list-style-type: none"> <li>(HPS)</li> </ul> Metal Halide <ul style="list-style-type: none"> <li>(MH)</li> </ul> Pulse Start Metal Halide <ul style="list-style-type: none"> <li>(PS)</li> </ul>	120 Volts <ul style="list-style-type: none"> <li>(120)</li> </ul> 208 Volts <ul style="list-style-type: none"> <li>(208)</li> </ul> 240 Volts <ul style="list-style-type: none"> <li>(240)</li> </ul> 277 Volts <ul style="list-style-type: none"> <li>(277)</li> </ul> 480 Volts <ul style="list-style-type: none"> <li>(480)</li> </ul> Multi-Tap Ballast Factory wired at 277v unless otherwise specified.	Wall Mount <ul style="list-style-type: none"> <li>(WM)</li> </ul>	Bronze <ul style="list-style-type: none"> <li>(BZ)</li> </ul> White <ul style="list-style-type: none"> <li>(WT)</li> </ul> Custom Color <ul style="list-style-type: none"> <li>(CC)</li> </ul> Consult Factory	Photo Cell <ul style="list-style-type: none"> <li>(PC__)</li> <li>(120 - 277v)</li> <li>(PC__)</li> </ul>

Direct Lighting Sales reserves the right to make modifications or changes to any of its products without prior written notification and without incurring obligation. Actual performance can vary depending on surrounding conditions